


comlock HF reader R- ED Color White (powder-coated)

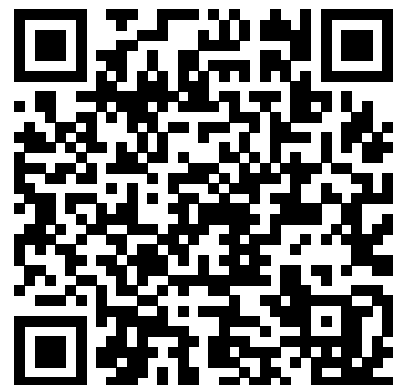

comlock HF reader R-ED Color White (powder-coated)

VdS approved, AWS Accessories

The comlock readers are designed for the connection to the comlock 1030/3000 evaluation units or for direct connection to intruder alarm systems with a comlock interface, comlock 410 door module and FWA-BM 140 basic module.

The operating states are indicated directly on the reader by a dual LED and a piezo sounder.

The HF reader is activated contact-free by an authorized HF transponder. In-wall mounting sets consisting of a plaster box, mounting frame and cover are available.

- EM 4102 transponder type
- Environmental class compliant with VdS 2110 class IV
- Connection cable 4 m
- Dimensions (W x H x L) 50 x 25 x 80 mm
- Standby power consumption < 4 mA

Color White (powder-coated)



Please only contact us via our registration form and only if you are a business person yourself. Every offer is subject to prior sale and includes your acceptance to our terms & conditions [Terms and conditions \(AGB\)](#). All logos and trademarks on this site are the property of their respective owners.

You will always receive an invoice including tax, which can be paid via wire transfer, in advance or cash. If you register on paypal, you may also pay by charging your paypal account with your credit card. If you are an EU member and you have a validated tax number which can be validated here: [VIES VAT number validation / MwSt.-Informationsaustauschsystem MIAS\) Validierung der MWSt.-Nummer](#) then you pay tax-free. If you are from outside the EU, you can only pay tax-free, if the export is done with the transport company, called 'Schenker'. If you are not using 'Schenker', we cannot guarantee that we will get the export confirmation in time. In that case, you have to pay tax and you get it.



**Brakensiek Systemhaus
GmbH & Co. KG
Klönnestraße 94
D-44143 Dortmund**

www.brakensiek.com

 **+49(0)231.985-00 10**

 **+49(0)231.985-2000**

BRAKENSIEK®
SYSTEMHAUS

Tim Brakensiek