


# Roll-up door contact RTK 4

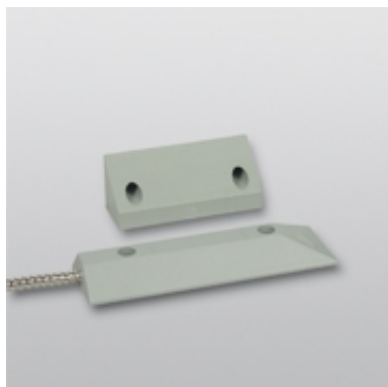

## **Roll-up door contact RTK 4**


VdS class B (G 196 648)

suitable for intrusion detection systems to DIN EN 50131-1

Cable length 2 m

Magnetic contact for overhead doors,  
sliding doors and garage doors;  
connection cables in a protective metal  
tube, without assembly materials.

- Material Gehäuse Polyamid GF
- Connection cable 4x0.14 mm<sup>2</sup>
- Connection cable for  
LSA-Plus-technique
- Contact load 10 W
- Type of protection IP 68 compliant  
to DIN 40050
- Environment protection category  
compliant to VdS 2110 III
- Dimensions of magnet (W x H x D) 100  
x 35 x 40 mm
- Dimensions of contact (W x H x D)  
159 x 19 x 50 mm
- Armoured cable 0.5 m
- Max. voltage 100 V DC
- Max. current 0.5 A

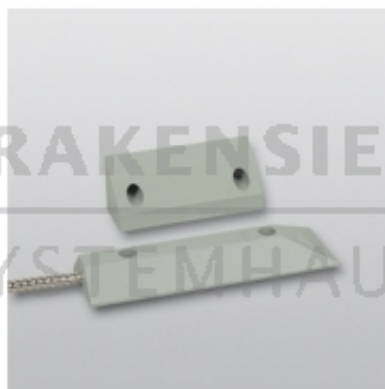

Please only contact us via our registration form and only if you are a business person yourself. Every offer is subject to prior sale and includes your acceptance to our terms & conditions [Terms and conditions \(AGB\)](#). All logos and trademarks on this site are the property of their respective owners.

You will always receive an invoice including tax, which can be paid via wire transfer, in advance or cash. If you register on paypal, you may also pay by charging your paypal account with your credit card. If you are an EU member and you have a validated tax number which can be validated here: [VIES VAT number validation / MwSt.-Informationsaustauschsystem MIAS\) Validierung der MWSt.-Nummer](#) then you pay tax-free. If you are from outside the EU, you can only pay tax-free, if the export is done with the transport company, called 'Schenker'. If you are not using 'Schenker', we cannot guarantee that we will get the export confirmation in time. In that case, you have to pay tax and you get it.



**Brakensiek Systemhaus  
GmbH & Co. KG**  
**Klönnestraße 94**  
**D-44143 Dortmund**

**BRAKENSIEK®**  
**SYSTEMHAUS**



**[www.brakensiek.com](http://www.brakensiek.com)**

**Tim Brakensiek**



 **+49(0)231.985-00 10**



 **+49(0)231.985-2000**